


# PRODUCT OVERVIEW

## OOSH HINGED STOP COLLAR

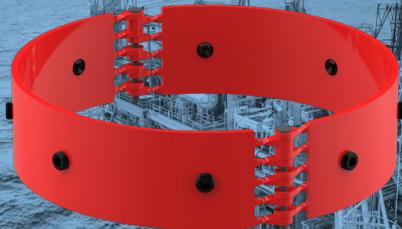

### ENGINEERING SOLUTIONS FOR CHALLENGING WELLS

The OOSH high-strength hinged stop collar is designed to provide superior performance in challenging well conditions. Utilizing the same integrated hinge technology as Centek's S2 Hinged bow spring centralizer, the OOSH offers a robust solution for securing and protecting centralizers on the casing string. Made from ultra-high-strength materials and heat-treated to enhance durability, the OOSH features a low-profile twisted hinge design for quick and easy installation. Its advanced engineering enables it to withstand high axial forces, ensuring reliability and efficiency in demanding wellbore environments.

With a unique set screw design, the OOSH delivers industry-leading holding forces while minimizing damage to wellbore tubulars. Fitment is tested up to 50 lb-ft of torque, and anti-vibration screw retention ensures consistent performance during operations. Available in single and double-row HD set screw configurations to accommodate different casing sizes, the OOSH exceeds API 10D-2 performance standards without requiring 4 inches of axial slippage.


### KEY PRODUCT BENEFITS

- Does not require 4" axial slippage to exceed the API 10D-2 performance standard
- Premium slip on stop collar
- Fitment tested to up to 50 lb-ft torque
- Anti-vibration screw retention
- Maximum performance on casing grades up to P110

### TARGET APPLICATIONS

- Demanding well conditions

### PERFORMANCE RATINGS

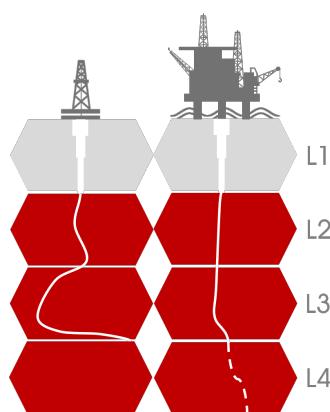

## CORE PRODUCT SIZING

| Product size | Stop Collar Part Number |
|--------------|-------------------------|
| 5 1/2" ID    | 0512-00SH               |
| 7" ID        | 0700-00SH               |
| 9 5/8" ID    | 0958-00SH               |
| 9 7/8" ID    | 0978-00SH               |
| 13 3/8" ID   | 1338-00SH               |
| 13 5/8" ID   | 1358-00SH               |
| 18" ID       | 1800-00SH               |
| 18 5/8" ID   | 1858-00SH               |
| 20" ID       | 2000-00SH               |
| 22" ID       | 2200-00SH               |
| 24" ID       | 2400-00SH               |
| 26" ID       | 2600-00SH               |
| 28" ID       | 2800-00SH               |

## RECOMMENDED



## S2 HINGED CENTRALIZER

The Centek S2 Hinged Centralizer combines the performance of single-piece centralizers with the efficiency of a hinged design, offering up to 30% savings on transport, storage, and installation costs. Its unique twisted hinge with a pre-pinned one-way pin enables quick fitment, making it ideal for land, offshore, and deepwater wells, as well as highly deviated wellbores and long lateral runs. With precise fitment, high standoff ratios, and reduced carbon footprint, the S2 Hinged ensures effective zonal isolation in demanding applications.

## FULL STOP COLLAR PRODUCT RANGE

| MODEL | DUCT        | STYLE   | CONSTRUCTION | FITMENT      | APPLICATION | RATING |
|-------|-------------|---------|--------------|--------------|-------------|--------|
|       | Ultra-light |         |              |              |             |        |
| HSN   | Light       |         |              |              |             | 4 4    |
| 0SO   | Standard    |         |              |              |             | 8 6    |
| 00SO  | Heavy       | Slip-on | Steel        | Single Piece | Level 1     | 8 7    |
| 00SH  |             | Hinged  | Heat Treated | Spiral Nail  | Level 2     |        |
| HDSO  |             |         |              | Set Screws   | Level 3     |        |
| HDSH  |             |         |              |              | Level 4     |        |
| UHD   |             |         |              |              |             | 8 8    |

For more information talk to our Global Sales team – [sales@centekgroup.com](mailto:sales@centekgroup.com)

Centek Inc, 5500 S.W. 36th Street, Oklahoma City, OK 73179 +1 405 219 3200

Centek Ltd, Station View, Brunel Industrial Estate, Newton Abbot, Devon TQ12 4AE +44 (0) 1626 337636