

S2-HD HEAVY DUTY, SINGLE PIECE, BOW SPRING CENTRALIZER

ENGINEERING SOLUTIONS FOR CHALLENGING WELLS

This heavy duty version of the patented S2 bow spring centralizer is engineered for ultra-high strength in challenging wells.



Single piece construction means the S2-HD has no weak points. It is designed for casing running environments with heavy loads where a solid centralizer may be used traditionally.

The S2-HD is manufactured to gauge. Its exceptional restoring force is delivered with zero start and running forces and generates high levels of stand-off.

KEY PRODUCT BENEFITS

- API 10D compliant
- Ultra-high strength
- Made to gauge
- Optimum stand-off
- Zero start and running forces
- Maximum flow by area
- Reduced torque and drag
- Enhanced rotation and reciprocation during run-in-hole (RIH)

TARGETED APPLICATIONS

- Onshore and offshore
- Unconsolidated wells
- Extended reach, horizontal and highly deviated wells
- HTHP and geothermal wells
- Shale oil & gas wells
- OH completions w/packers
- Sand screen completions
- J-type and S-type

PERFORMANCE RATINGS

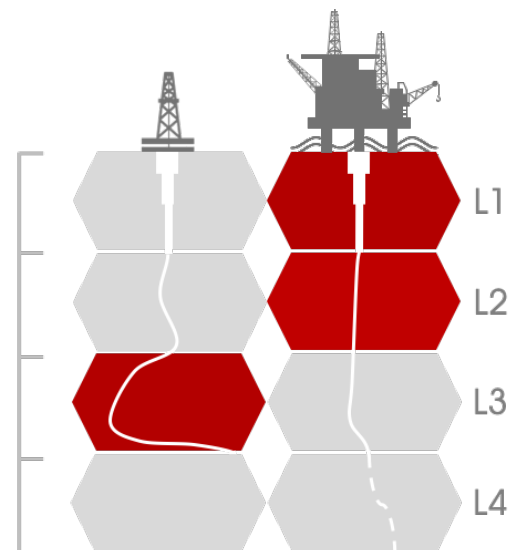
7
FLEXIBILITY



7
RUNABILITY



8
STRENGTH

CORE PRODUCT SIZING*

Product size	PART NUMBER	
	Centralizer	Stop collar
5-1/2" ID for use in 8-1/2" Hole	0512-0812SHD	0512-HDSO
5-1/2" ID for use in 8-3/4" Hole	0512-0834SHD	0512-HDSO
7" ID for use in 8-1/2" Hole	0700-0812SHD	0700-HDSO
7" ID for use in 8-3/4" Hole	0700-0834SHD	0700-HDSO
9-5/8" ID for use in 12-1/4" Hole	0958-1214SHD	0958-HDSO
9-7/8" ID for use in 12-1/4" Hole	0978-1214SHD	0978-HDSO
13-3/8" ID for use in 17-1/2" Hole	1338-1712SHD	1338-HDSO
13-5/8" ID for use in 17-1/2" Hole	1358-1712SHD	1358-HDSO
14" ID for use in 17-1/2" Hole	1400-1712SHD	1400-HDSO

*custom sizes are available. Speak to your sales representative for more information.

FULL STRING SOLUTION

WELL TYPE	ONSHORE						ONSHORE + OFFSHORE			UNDER-REAM / OFFSHORE		
WELL LEVEL	L1					L1+L2	(L1 + L2)+L3			(L3+L4)		
PRODUCT NAME & TYPE	OPR	OSN	OSA Coming soon	OBH	OBH-W	OBW	OBS-2	S2-HD	S2	S2-H	TUR (Includes variants)	UROS (Includes variants)
	RIGID	SOLID BODY		BOW SPRING								
	Non-welded hinge	Pressed bows	Alloy	Non-welded hinge	Welded, hinge	Welded	Single piece	Heavy duty, single piece	Single piece	Hinged	Single piece	Single piece
FLEXIBILITY (0-8)	0	0	0	5	5	5	6	7	7	7	8	8
RUNABILITY (0-8)	3	5	6	4	5	5	7	7	8	8	8	8
STRENGTH (0-8)	3	8	8	4	5	5	6	8	7	7	7	7

For more information talk to our Global Sales team today or use our Product Selector Tool to find the right product for your application – sales@centekgroup.com

Centek Inc, 5500 S.W. 36th Street, Oklahoma City, OK 73179 +1 405 219 3200

Centek Ltd, Station View, Brunel Industrial Estate, Newton Abbot, Devon TQ12 4AE +44 (0) 1626 337636