



WHEREVER YOU WANT TO GO
WE'LL GET YOU THERE

Full product catalogue. Released 1st January 2026



CENTEK
excellence to the core

OUR MISSION

WE HAVE BUILT A
GLOBAL
REPUTATION ON
THE WORLD
LEADING
PERFORMANCE
OF OUR UNIQUE
CENTRALIZER
TECHNOLOGY

Now, we're on a mission: to build on this leadership through intelligent engineering solutions that **enable safer and more productive access to energy one well at a time.**

Company highlights:

- Operating globally, throughout Europe, the Americas, Asia Pacific and the Middle-East, working with major oil companies
- The largest centralizer manufacturing capacity in the world across 3 manufacturing bases
- Expert, highly trained and dedicated global customer support team
- Engineers work in the field with customers to provide optimum solutions
- Manufacturing and quality control carried out in house with testing through the supply chain and full product traceability
- Well simulations can be provided using our advanced, proprietary software
- Wide range of quality centralizers for all well types

EVERY MINUTE ON A RIG MEANS MONEY

From geothermal to oil & gas, and from land to ultra-deep water, operators are constantly pushing the boundaries of where energy can be found and extracted.

Centek outperforms the competition by finding solutions to maximize efficiency and save time and costs. Centek products create optimized standoff, cementation and flexibility down hole for faster runs and improved cementation results.

SAVE TIME

In today's volatile drilling environment, time is the only thing left to cut. Centek products frequently save hours of rig time by getting to total depth, with no issues.

LOWER RISK

Our centralizers and stop collars are proven to lower the risk of delays, leaks and channeling - providing the centralization needed for a robust cement sheath.

REDUCE COSTS

Reliable, dependable, durable and available when you need it, our extensive range means we have the right centralizer for every casing running scenario.

IMPROVE RESULTS

We've got 25 years' experience of use in the field with our best-in-class products and a proven track record of value for the money.


OUR PRODUCTS

Our full string product line means we have the right tools for all your wellbore sections, formations and down hole conditions. All from local manufacturing facilities.



LEVEL 1 CENTRALIZERS

Our level 1 centralizers are heat treated for strength and optimized standoff in less challenging wells. They are designed for onshore, vertical and slightly deviated applications where an economic solution is preferred but performance is expected.

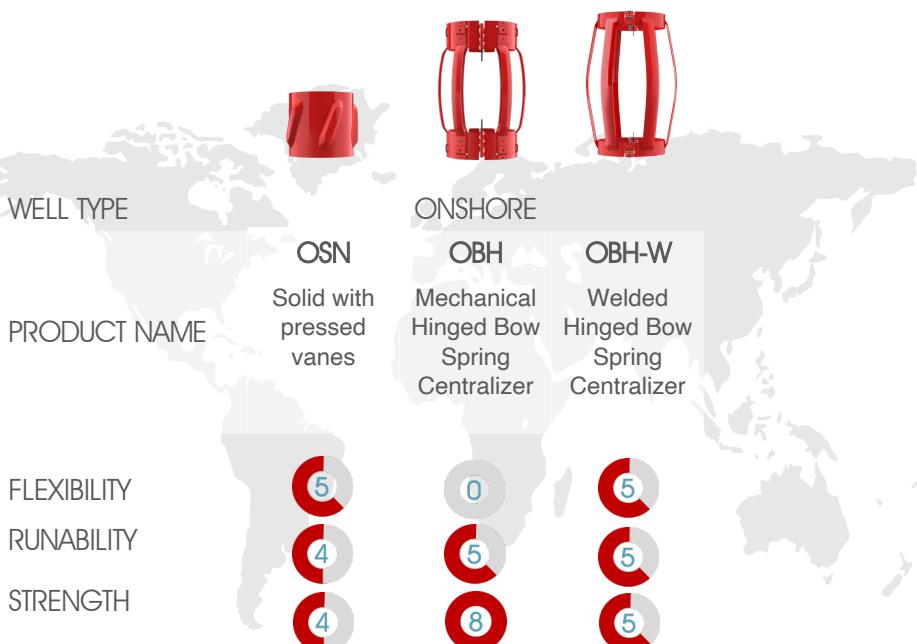

Centralization and the ease of running casing is often a balance between strength and flexibility which combine to support, what we call, 'runability'. To help with product selection we've added a rating to all our products for flexibility, runability and inherent strength.

LEVEL 1 CENTRALIZERS



Key Information

Sizing from 4 1/2" to 13 3/8"

Available with range of high strength stop collars

OSN

Solid Body Centralizer with Pressed Bows

Made from solid steel with pressed vanes, the OSN functions like a bearing during pipe rotation and helps to reduce torque requirements

- High axial load strength
- Straight and right-hand spiral vane designs available to maximize fluid dynamics
- Steel construction provides superior toughness



Key Information

Sizing from 4 1/2" to 26"

Stop collar available with same technology


OBH

Mechanical Hinged Bow Spring

Bow springs are manufactured from high quality alloy steel, hot bent to shape using dies and then heat treated for consistent spring characteristics

- 30% lower delivery and storage costs
- Extended profile
- Easy field assembly
- Designed to exceed API 10D



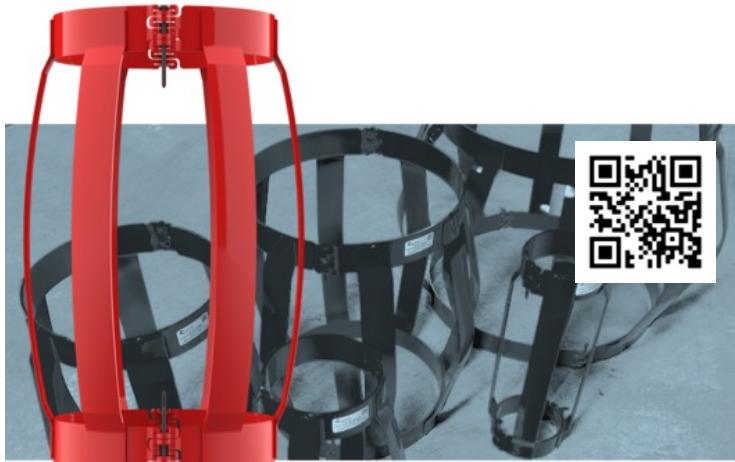

Key Information

Sizing from 4 1/2" to 26"

Available with high performance stop collars

OBH-W

Welded Hinged Bow Spring

The OBH-W hinged centralizer features heat-treated, spring-steel bows which are welded to rigid high strength end bands for optimized standoff in less challenging wells.

- Can be used over casing couplings
- Economic choice / high performance
- Designed to exceed API 10D
- Unique, high strength hinge



LEVEL 2 AND 3 CENTRALIZERS

Centek ES, OBS and S2 centralizers are robust and ultra-high-strength with no weak points but with the flexibility and restoring force to absorb both axial and radial loads. They are manufactured to gauge and provide maximum standoff, eliminating cement channeling.



WELL TYPE	ONSHORE		ONSHORE & OFFSHORE		
	ES	OBS	S2	S2-H	S2-HD
PRODUCT NAME	Single Piece, Slip On, Bow Spring Centralizer	Single Piece, Slip On, Bow Spring Centralizer	Single Piece, Slip On, Bow Spring Centralizer	Hinged, Bow Spring Centralizer bow spring	Heavy Duty Single Piece, Slip On, Bow Spring Centralizer
FLEXIBILITY	6	4	7	7	7
RUNABILITY	7	5	8	8	7
STRENGTH	6	7	7	7	8

Centralization and the ease of running casing is often a balance between strength and flexibility which combine to support, what we call, 'runability'. To help with product selection we've added a rating to all our products for flexibility, runability and inherent strength.

LEVEL 2 CENTRALIZERS



Key Information

Sizing from 4 1/2" to 14"

Corresponding range of high strength stop collars

ES

Single piece, bow spring

Our latest economical, single-piece solution engineered for most onshore applications. Designed with integrated tabs into the end-band to increase flexibility.

- Good standoff
- High restoring force
- Exceeds API 10D version 7



Key Information

Sizing from 4 1/2" to 13 3/8"

Corresponding range of high strength stop collars



OBS

Single piece, bow spring

The OBS single piece, bow spring centralizer has been reintroduced for onshore vertical, horizontal or deviated wells. It is designed to be robust in tough casing running environments.

- Good standoff
- High restoring force
- Exceeds API 10D version 7



LEVEL 3 CENTRALIZERS



Key Information

Sizing from 2 7/8" to 24"

Available with high performance stop collars



S2

Single piece, bow spring

The patented S2 bow spring centralizer is the premium single piece choice for challenging wellbores. Engineered strength and flexibility optimize RIH saving operators time and money getting to total depth.

- Enhanced rotation and reciprocation during RIH
- Reduced torque and drag
- Supports cementing best practices
- Tested to exceed API 10D



Key Information

Sizing from 5 1/8" to 28"

Available with high performance stop collars



S2 HINGED

Hinged, bow spring

The S2 Hinged centralizer is high strength and engineered for challenging applications typically requiring a single piece product. It has a twisted hinge with a one of a kind "one way" hinge pin.

- Tested to exceed API 10D
- Unique high strength hinge and hinge pin design is as strong as a single piece centralizer
- Safe and quick installation
- 30% reduction on cost of transport and storage and lower carbon footprint



LEVEL 3 CENTRALIZERS



Key Information

Sizing from 5 1/2" to 14"

Available with high performance stop collars

S2-HD

Heavy duty, single piece, bow spring

Single piece construction means the S2-HD has no weak points. It is designed for casing running environments with heavy loads where a solid centralizer may be used traditionally.

- Tested to exceed API 10D
- Ultra-high strength
- Reduced torque and drag
- Enhanced rotation and reciprocation during run-in-hole (RIH)



LEVEL 3 AND 4 CENTRALIZERS

Under reamed and close tolerance well sections create several engineering issues which affect run-in-hole (RIH) performance due to the bows being compressed while passing through smaller ID of the previous set casing. Our level 3 and 4 centralizers are developed to perform in the under-reamed sections found in some of the world's most challenging offshore fields, combining high strength with high flexibility.



WELL TYPE	UNDER-REAMED						DEEPWATER	
	TUR	UROS	TUR-CT	UROS-CT	TUR-SUB	UROS-SUB		
PRODUCT NAME	Single Piece, Bow Spring	Single Piece, Bow Spring	Close Tolerance Single Piece, Bow Spring	Close Tolerance Single Piece, Bow Spring	Single Piece, Bow Spring on a Sub Body	Single Piece, Bow Spring on a Sub Body		
FLEXIBILITY	8	8	8	8	8	8		
RUNABILITY	8	8	8	8	8	8		
STRENGTH	7	7	7	7	7	7		

Centralization and the ease of running casing is often a balance between strength and flexibility which combine to support, what we call, 'runability'. To help with product selection we've added a rating to all our products for flexibility, runability and inherent strength.

UNDER-REAM CENTRALIZERS



Key Information

Sizing from 4 1/2" to 16"

Available with high performance stop collars

TUR

Single piece, bow spring

The TUR bow spring centralizer is designed to be run in under-ream applications found in challenging offshore fields. The TUR centralizer is proven to give good cementation in tight casing and close tolerance applications.

- Highly flexible
- Application specific restoring force
- Large flow by area enhances fluid dynamics.

Key Information

Sizing from 7" to 17"

Available with high performance stop collars



UROS

Single piece, bow spring

The UROS centralizer is proven to give good cementation in tight casing and under-ream applications. Large flow by area enhances fluid dynamics.

- Low starting forces
- Reduced running forces - saves time
- Application specific restoring force
- Enhanced fluid dynamics



CLOSE TOLERANCE CENTRALIZERS



Key Information

Sizing: 9 3/8" to 11 3/4"

Available with high performance stop collars

TUR-CT

Close tolerance centralizer

The TUR-CT is designed with a precisely formed cross bow curvature and has no 'knife edges' to reduce the risk of subsea well head damage on insertion. This also adds additional strength to the bows to support performance in close tolerance applications.

- Alternative to Centralizer Subs
- Engineered to precise ring-gauge tolerances
- Low-profile design maximizes fluid dynamics

Key Information

Sizing from 11 3/4" to 17"

Available with high performance stop collars

UROS-CT


Close tolerance centralizer

The UROS-CT centralizer is designed to be ultra-flexible to ease the string to TD. It is designed to challenge the traditional and extremely costly Centralizer Sub market.

- Low-profile design provides peak flow-by performance to reduce the surge effect
- Engineered to precise ring-gauge tolerances, because every millimeter saved allows for greater expansion in the open hole



CENTRALIZER SUBS

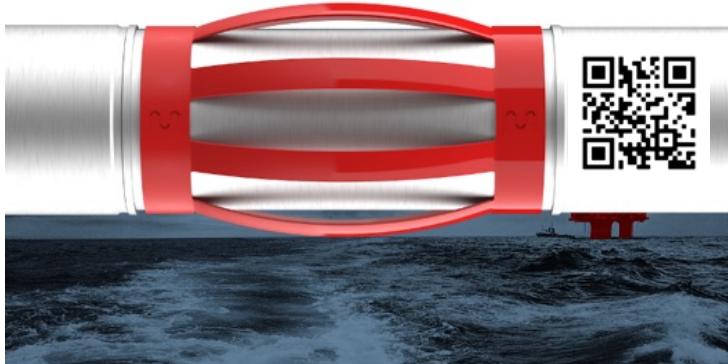

Key Information

Sizing: 9 5/8" to 17 7/8"

TUR-SUB

Centralizer sub

During operations, TUR-SUB centralizers will recess entirely into the sub body enabling them to pass through the tightest of restrictions. The sub body is manufactured to API 5CT requirements.

- Designed specifically for ultra-tight tolerance applications
- Will meet or exceed host casing burst and collapse specifications
- Interlocked band design gives the strength of a single piece centralizer



Key Information

Sizing from 9 5/8" to 17"



UROS-SUB

Centralizer sub

With minimal torque values, the UROS-SUB's single piece centralizer reduces the risk of failure in deepwater applications. This engineered solution enables the centralizer to rotate on the sub body.


- The sub body is manufactured to API 5CT requirements
- Fewer bows for more efficient RIH
- Interlocked band design gives the strength of a single piece centralizer



LEVEL 1 & 2 STOP COLLARS

Our stop collars for less challenging wells with horizontal or vertical sections are available with set screws. These are developed for quick fitment and secure holding forces.

All Centek stop collars are tested to meet the API 10D-2 standard.

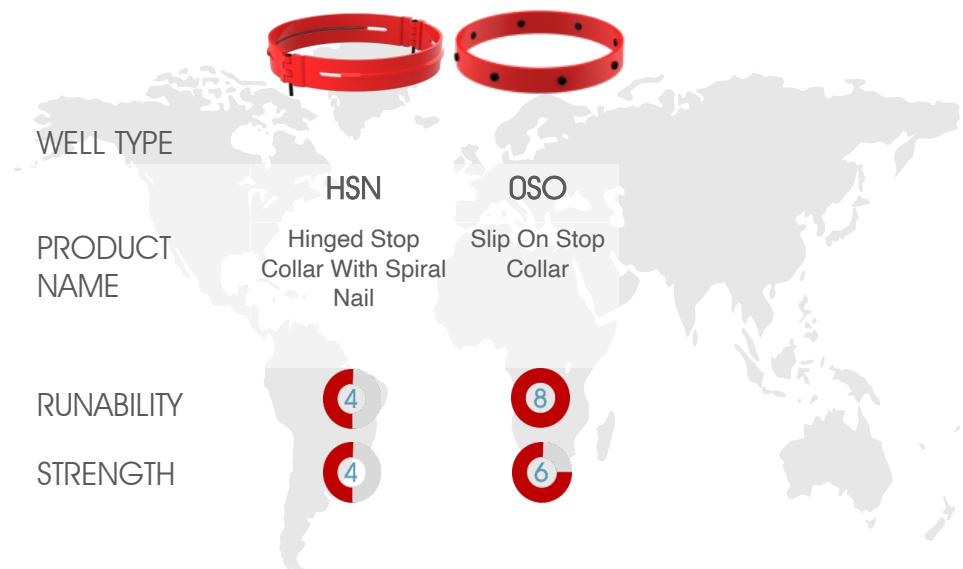

To help with product selection we've added a rating to all our products for runability and inherent strength.

LEVEL 1 AND 2 STOP COLLARS



Key Information

Sizing from 4 1/2" to 18 5/8"

Counterparts of Centek's Level 1 centralizers

HSN

Hinged stop collar with spiral nail

The spiral nail is driven firmly into internal grooves which locks the stop collar against the casing, providing maximum annular clearance, improving installation and reducing rig time

- Economic choice
- Quick installation
- Low profile for low annular clearances
- For use with standard casing grades



Key Information

Sizing from 3 1/2" to 16"

Counterparts of Centek's Level 2 centralizers



OSO

Slip on stop collar

OSO slip on stop collars are heat treated for strength and to reduce brittleness.

Set screw design provides high holding forces without excessive marring of wellbore tubulars.

- Anti-vibration screw retention
- For use with standard casing grades



LEVEL 3 AND 4 STOP COLLARS

All Centek premium stop collars are heat treated to improve tensile strength, especially in the critical internal thread area. This is combined with high tensile set screws of a specific thread pitch to match the low-profile characteristics of the product.

All our premium stop collars are fitment tested to up to 50 lb-ft torque, with anti-vibration screw retention and does not require 4" axial slippage to exceed the API 10D-2 performance standard.



To help with product selection we've added a rating to all our products for runability and inherent strength.

SLIP ON STOP COLLARS



Key Information

Sizing from 2 7/8" to 20"

Designed for use in challenging wellbores

00SO

Slip On Stop Collar

Made from the same material as our ultra-high strength centralizers, the 00SO's robust design can withstand high axial forces, making it suitable for demanding well conditions.

- Unique set screw design provides industry leading holding forces without excessive marring of wellbore tubulars.
- Does not require 4" axial slippage to exceed the API 10D-2 performance standard



Key Information

Sizing from 4 1/2" to 24"

Designed for use in challenging wellbores



HDSO

Heavy Duty Slip On Stop Collar

The HDSO is a high performance holding device able to withstand high axial forces in challenging well conditions. Made from the same steel as Centek heavy duty centralizers

- High holding force
- 2 offset rows of M12 socket set screws
- Fitment tested to up to 50 lb·ft torque



HINGED STOP COLLARS



Key Information

Sizing from 5 1/2" to 24"

Designed for use with S2 hinged centralizer

OOSH

Hinged Stop Collar

The OOSH is a high strength stop collar developed for use in challenging wells with the same integrated hinge technology as the S2 Hinged bow spring centralizer.


- Utilizes a low profile, twisted hinge design for quick installation
- Can withstand high axial forces, making it suitable for demanding well conditions



Key Information

Sizing from 13 5/8" to 24"

Designed for use with S2 hinged centralizer

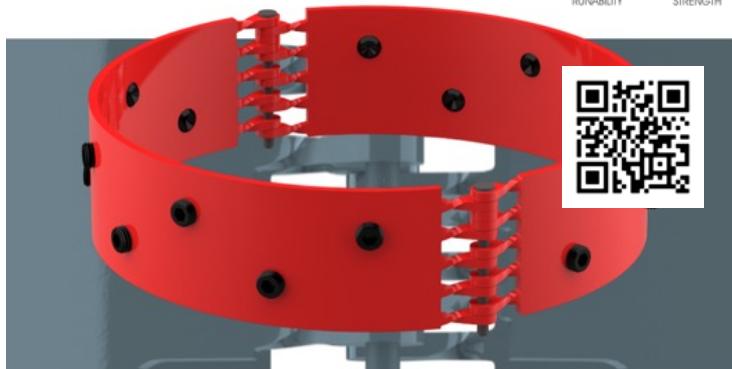

HDSH

Heavy Duty Slip On Stop Collar

Each HDSH stop collar is made from the same patented, heat treated, steel as our S2-HD centralizers. This ensures that the HDSH can withstand high axial forces, making it suitable for demanding well conditions.

- Premium, high holding force, heavy duty hinged stop collar
- No yield around thread effective diameter





Centek Inc
5500 S.W. 36th Street
Oklahoma City
OK 73179

T +1 405 219 3200
W centekgroup.com
E sales@centekgroup.com