CENTEK
excellence to the core

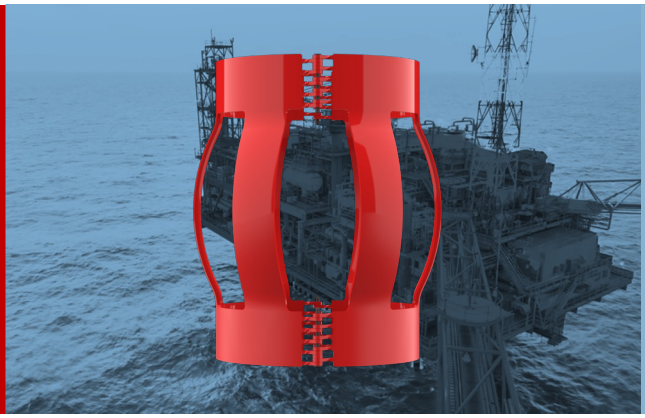

PRODUCT OVERVIEW

S-H BOW SPRING CENTRALIZER

ENGINEERING SOLUTIONS FOR CHALLENGING WELLS

Featuring a unique twisted hinge with one-way pin, the S2 Hinged (S-H) centralizer combines the strength and performance of Centek's industry-leading single-piece centralizers with up to 30% savings on transport, storage, and installation costs. This is made possible by its ability to nest efficiently on a pallet.

Fitment is quick and easy, with one hinge delivered pre-pinned, achieving installation times comparable to slip-on centralizers. This design makes the S-H ideal for land, offshore, and deepwater wells, highly deviated wellbores, long lateral runs, and situations where slip-on centralizers are not feasible.

The S-H offers several advantages, including a reduced carbon footprint due to minimized transport and storage needs, and each unit is made to gauge for precise fitment. The high standoff ratios promote effective zonal isolation, providing added value and efficiency in demanding applications.

KEY PRODUCT BENEFITS

- Tested to exceed the requirements of API Specification 10D, Seventh Edition.
- Unique high-strength hinge and hinge pin design – as strong as a single-piece centralizer
- Can be used while rotating/reciprocating the casing
- Safe and quick installation
- Can be transported on the pipe and installed on the pipe rack or rig floor

TARGET APPLICATIONS

- Land, offshore and deepwater
- Highly deviated wells
- Wells with long lateral runs
- Applications where slip-on centralizers cannot be used



The Centek S-H centralizer and 00SH and HDSH stop collars all feature the same innovative integrated, low-profile twisted hinge with "one-way" hinge pin for secure fitment.

PRODUCT APPLICATION

The Centek S-H centralizer is a high-strength solution engineered for challenging well applications that would typically require a single-piece design.

Application Levels

OFFSHORE

For more information talk to our Global Sales team – sales@centekgroup.com
Centek Inc, 5500 S.W. 36th Street, Oklahoma City, OK 73179 +1 405 219 3200
Centek Ltd, Station View, Brunel Industrial Estate, Newton Abbot, Devon TQ12 4AE +44 (0) 1626 337636

CORE PRODUCT SIZING

Product size	Centralizer Part Number	Recommended Stop Collar Part Number
5-1/2" ID for use in 8-1/2" Hole	0512-0812S-H	0512-00SH
5-1/2" ID for use in 8-3/4" Hole	0512-0834S-H	0512-00SH
7" ID for use in 8-1/2" Hole	0700-0812S-H	0700-00SH
7" ID for use in 8-3/4" Hole	0700-0834S-H	0700-00SH
9-5/8" ID for use in 12-1/4" Hole	0958-1214S-H	0958-00SH
9-7/8" ID for use in 12-1/4" Hole	0978-1214S-H	0978-00SH
13-3/8" ID for use in 17-1/2" Hole	1338-1712S-H	1338-00SH
13-5/8" ID for use in 17-1/2" Hole	1358-1712S-H	1358-00SH
18" ID for use in 24" Hole	1800-2400S-H	1800-00SH
18-5/8" ID for use in 22" Hole	1858-2200S-H	1858-00SH
18-5/8" ID for use in 23" Hole	1858-2300S-H	1858-00SH
18-5/8" ID for use in 24" Hole	1858-2400S-H	1858-00SH
20" ID for use in 24" Hole	2000-2400S-H	2000-00SH
20" ID for use in 26" Hole	2000-2600S-H	2000-00SH
22" ID for use in 26" Hole	2200-2600S-H	2200-00SH
24" ID for use in 28" Hole	2400-2800S-H	2400-00SH
28" ID for use in 32" Hole	2800-3200S-H	2800-00SH
28" ID for use in 36" Hole	2800-3600S-H	2800-00SH
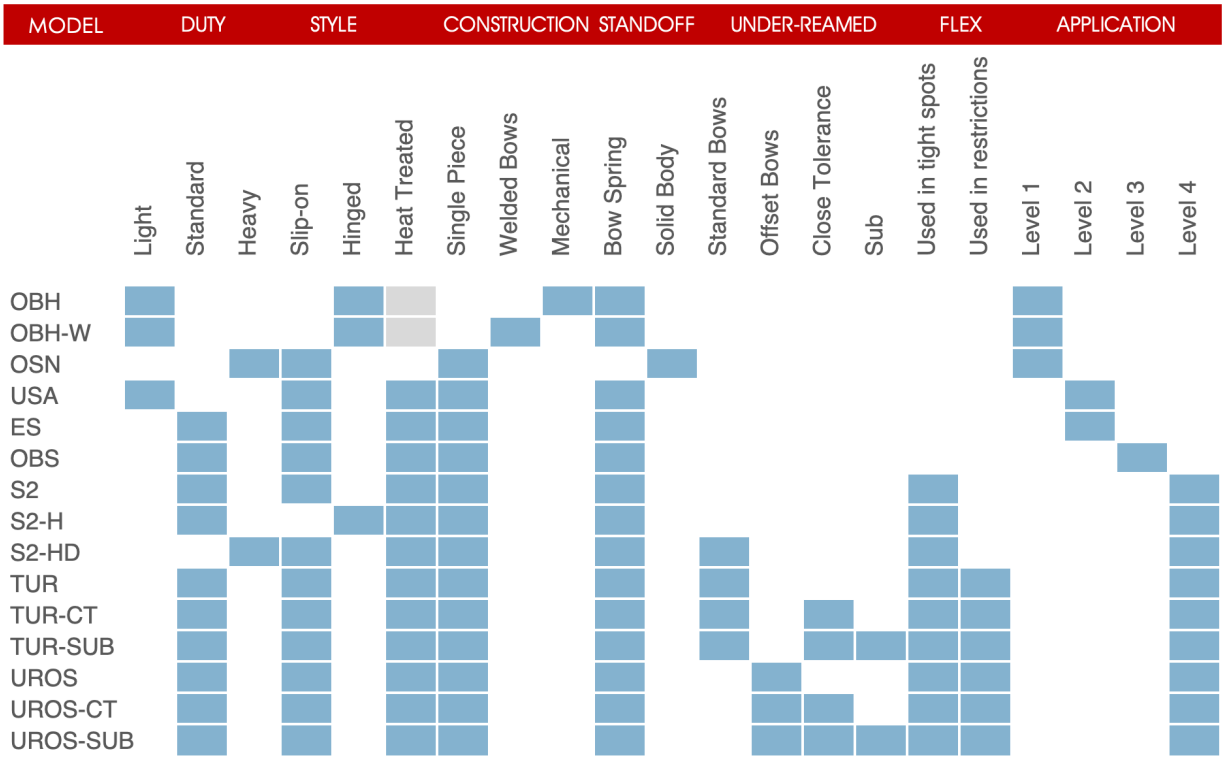
FULL CENTRALIZER PRODUCT RANGE