

HDSH HEAVY DUTY, HINGED STOP COLLAR



ENGINEERING SOLUTIONS FOR DEMANDING WELLS CONDITIONS

This heavy duty hinged stop collar is designed for use in challenging wells, providing a highly effective hinged method of holding centralizers on the pipe and support cementing.



Each HDSH stop collar is made from the same patented steel as our heavy duty S2-HD centralizers. Like the S2-HD these stop collars are heat treated for strength and tempered for resilience. This ensures that the HDSH can withstand high axial forces, making it suitable for demanding well conditions.

Our radical new twisted hinge has a one of a kind “one way” hinge pin. It is high strength and built for quick fitment on the rig floor, if necessary.

CENTRALIZERS

HDSH stop collars are developed as counterparts to the Centek S2-H centralizer.


FEATURES AND BENEFITS

- Premium, high holding force, heavy duty hinged stop collar
- No yield around thread effective diameter
- Fitment tested to up to 50 lb-ft torque
- Anti-vibration screw retention
- Maximum performance on casing grades up to P110

TARGET APPLICATIONS

- Demanding well conditions

PERFORMANCE RATINGS

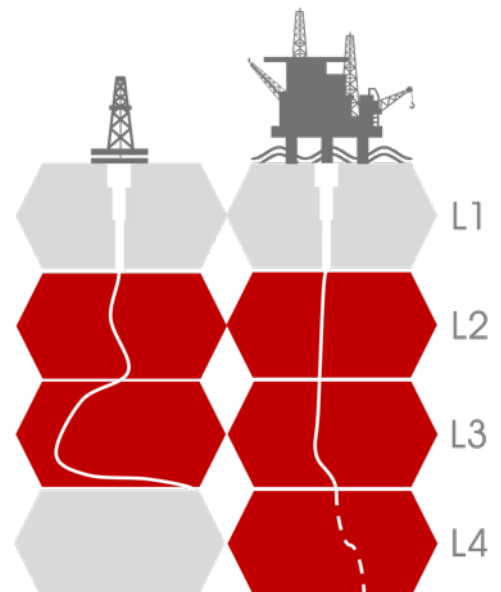















CORE PRODUCT SIZING

Product size	PART NUMBER
13 5/8" ID	1358-HDSH
18 5/8" ID	1858-HDSH
20" ID	2000-HDSH
22" ID	2200-HDSH
24" ID	2400-HDSH

*custom sizes are available. Speak to your sales representative for more information.

FULL STRING SOLUTION – STOP COLLARS

WELL TYPE	ONSHORE			ONSHORE + OFFSHORE			
WELL LEVEL	L1	L2	L2	(L1 + L2) + L3 + L4			
PRODUCT NAME	Coming soon		OSO	OOSO	OOSH	HDSO	HDSH
DESCRIPTION	Slip on stop collar with spiral nail fitment	Hinged stop stop collar with draw bolt	Slip on stop collar with set screws	Slip on stop collar with set screws	Hinged, stop collar with set screws	Heavy duty, slip on stop collar with set screws	Hinged, heavy duty stop collar with set screws
RUNABILITY (0-8)							
STRENGTH (0-8)							

For more information talk to our Global Sales team today or use our Product Selector Tool to find the right product for your application – sales@centekgroup.com

Centek Inc, 5500 S.W. 36th Street, Oklahoma City, OK 73179 +1 405 219 3200

Centek Ltd, Station View, Brunel Industrial Estate, Newton Abbot, Devon TQ12 4AE +44 (0) 1626 337636